



Zone Controller & E-Fuse Testing

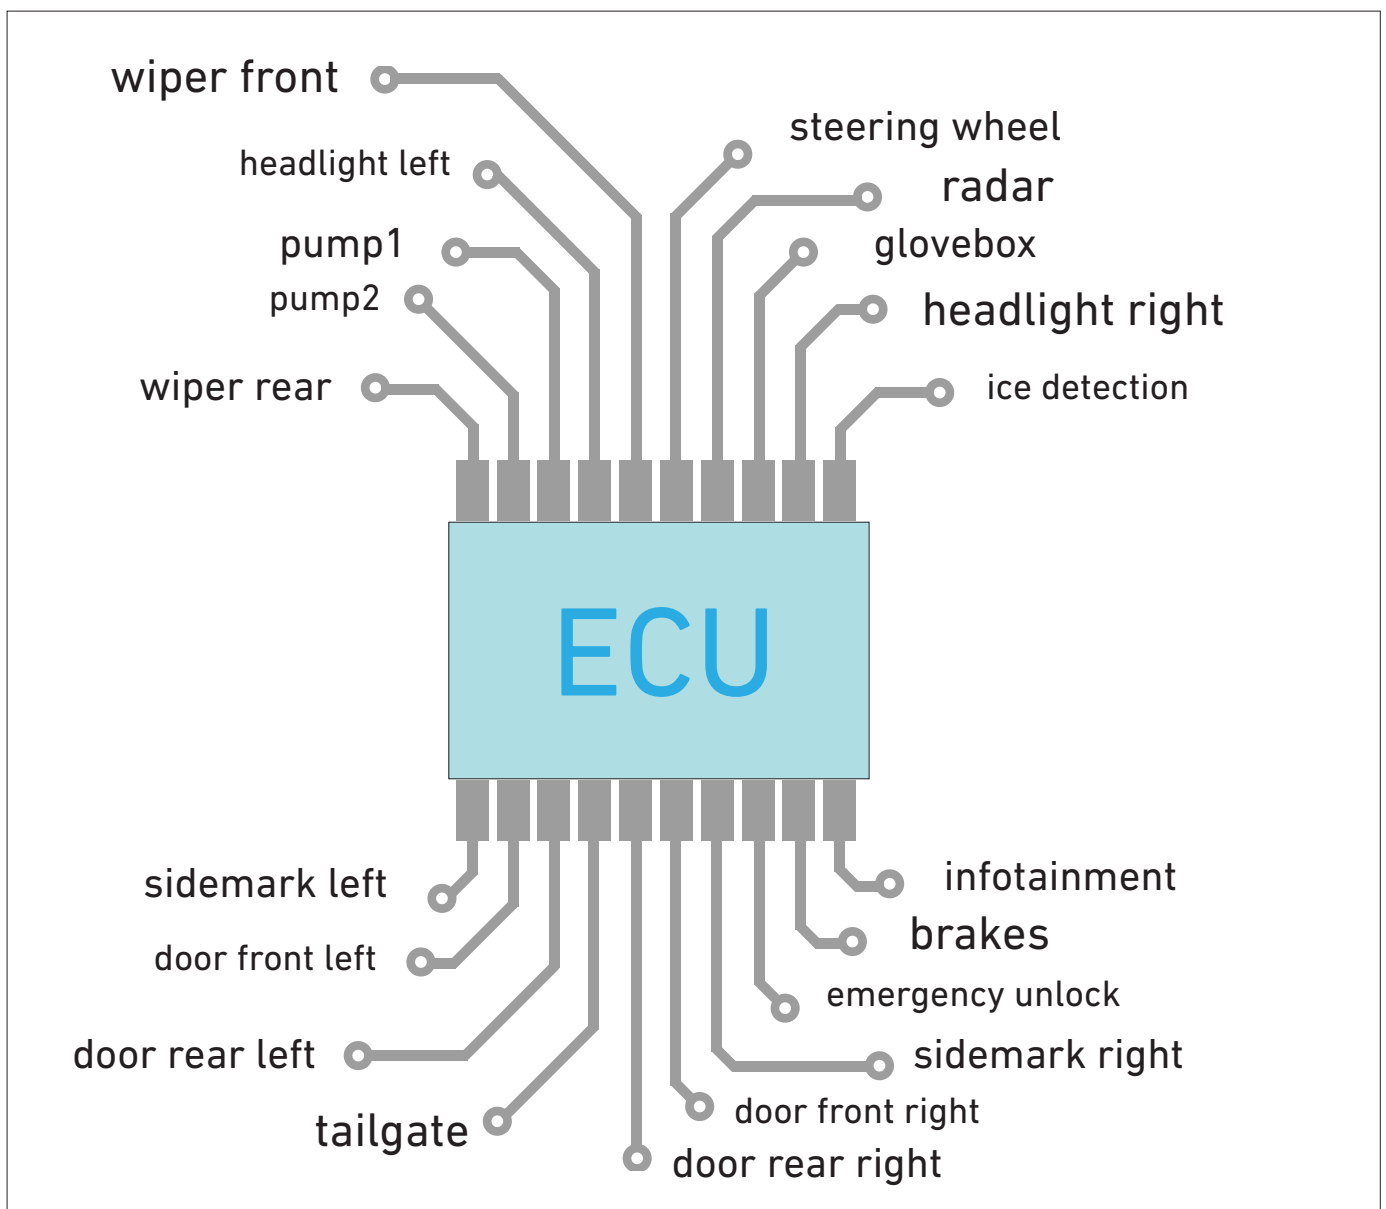

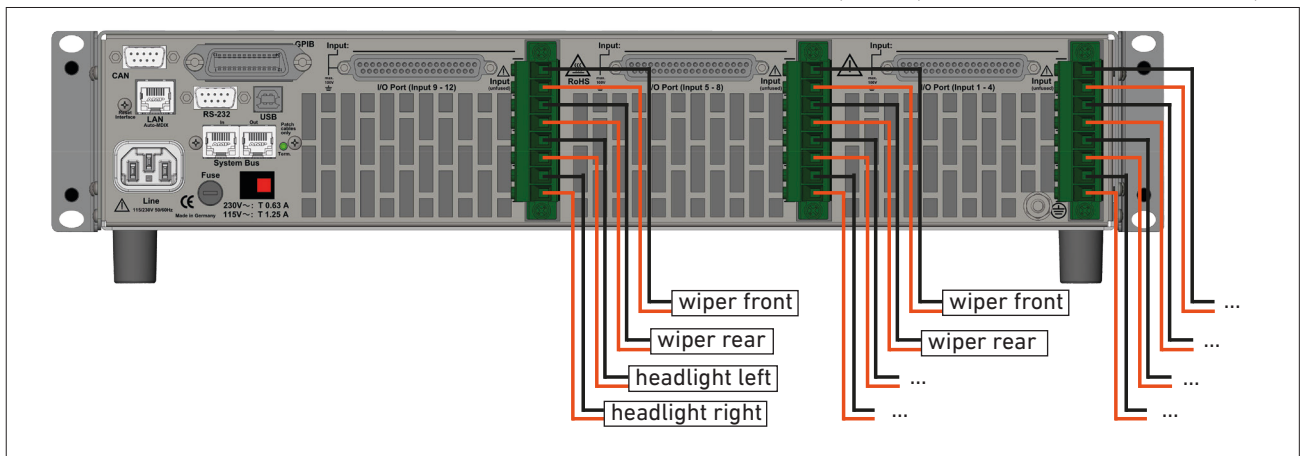

Per system:

- 1 master device with user and data interfaces in 19", 2 U
- Up to 5 slave devices
- Up to 72 load channels

Per 19" device:

- Electronic multi-channel load PMLA with up to 12 channels, depending on power
- 1800 W total power

Per module/channel:

- 150 W - 300 W - 450 W - 600 W
- 40 V - 60 V - 120 V - 240 V
- 1 A to 120 A



4 PMLA systems with a total of 288 channels

Features:

- Tailored configurations with mixed modules in 4 voltage and 4 power ranges
- CC, CV, CR, CP mode
- Graphical user interface at master device
- Group addressing and name assignment
- Extensive data interfaces
- SCPI programming and measuring
- Dynamic load profiles
- Discharge function for energy storage device test
- MPP tracking
- Trigger model
- Internal measurement data storage
- Electronic protection
- Analog control input for each channel
- Analog monitor outputs for U and I